

Step Two: A little Bit of This and That

You'll need the following:



Light:

Cut 4+ strips 1 1/2" x WOF (you may only need 4 strips)
Subcut into 1 1/2" squares – 136 (draw diagonal line on the wrong side)



Medium-Light:

Cut 3 strips 2 1/2" x WOF
Subcut into 2 1/2" squares - 48




Medium Dark:

Cut 1 + strips 1 1/2" x WOF
Subcut into 1 1/2" squares – 32 (draw diagonal line on the wrong side)
Cut 3 Strips 2 1/2" x WOF
Subcut into 2 1/2" squares - 48


HINT: Use the leftover strips from the previous step to lessen waste.

HINT: To make sure your triangle presses fully to the corner, sew just a thread or two off the drawn line toward the outside corner.

Layer a 1 1/2" Light square with the 2 1/2" Medium-Light square, right sides together. Sew on the diagonal line. Trim 1/4" from the diagonal line toward the outside corner, as shown. Press the seam allowance toward the outside. Set aside 16 units and label QT1. On the remaining units, repeat on the other top corner as shown in the diagram below. There will be a 1/4" overlap where the Light Background pieces meet in the middle, this is to compensate for the seam allowance when you are sewing the units together as you create your blocks. Create 16 units measuring 2 1/2". Label HT1.

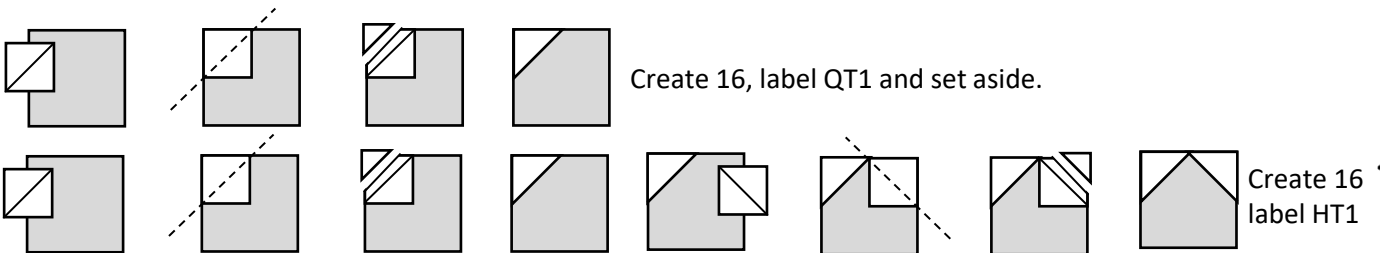

Repeat the process with the 1 1/2" Light squares and the 2 1/2" Medium-Dark squares. Create 8 with only one corner and label QT2. Create 40 units with both corners measuring 2 1/2". Label HT2.

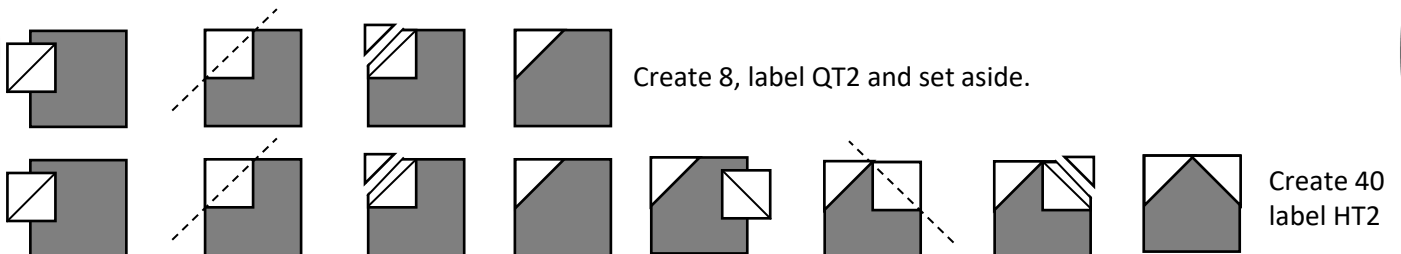

Repeat the process with the 1 1/2" Medium-Dark squares and the remaining 2 1/2" Medium-Light squares. Create 16 units measuring 2 1/2". Label HT3.

