

## Step Twelve: Sashing 1

You'll need the following:



Light:


1 1/2" Squares - 32



Medium Light:

2 1/2" x 10 1/2" rectangles - 16

Layer a 1 1/2" Light square with the 2 1/2" x 10 1/2" Medium-Light rectangle, right sides together. Sew on the diagonal line. Trim 1/4" from the diagonal line toward the outside corner, as shown. Press the seam allowance toward the outside. Repeat on the other top corner as shown in the diagram below. There will be a 1/4" overlap where the Light Background pieces meet in the middle, this is to compensate for the seam allowance when you are sewing the units together as you create your blocks. Create 16 units measuring 2 1/2" x 10 1/2". Label Sash1

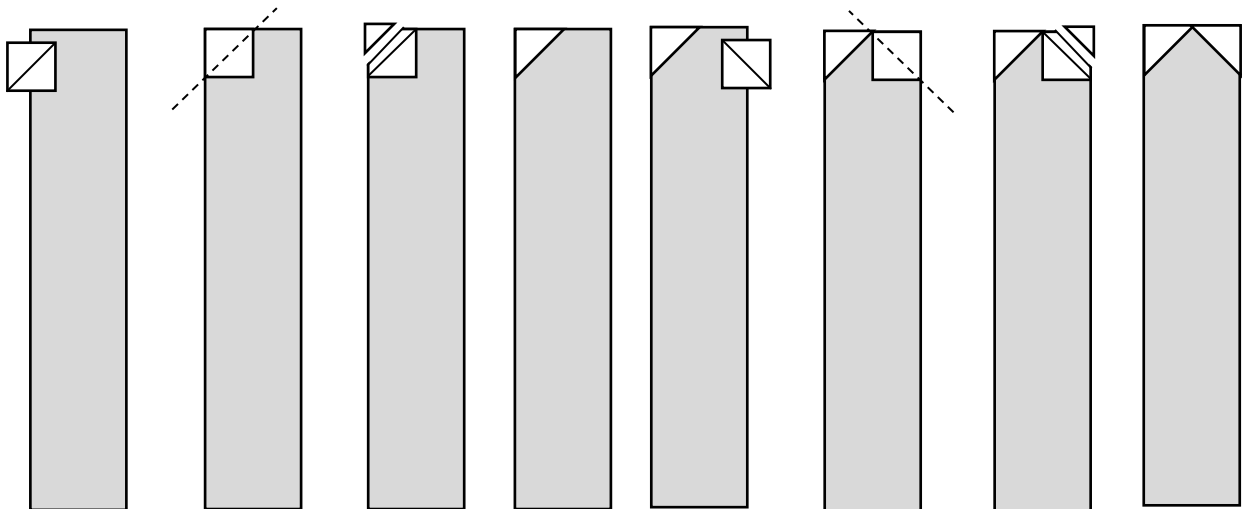

Create 16 units measuring 2 1/2" x 10 1/2".  
Label Sash1

## Step Thirteen: Sashing 2

You'll need the following:





Light:

1 1/2" squares - 48



2RS - 12

Layer a 1 1/2" Light square with the 2 1/2" x 10 1/2" 2RS rectangle, right sides together. Sew on the diagonal line. Trim 1/4" from the diagonal line toward the outside corner, as shown. Press the seam allowance toward the outside. Repeat on all 4 corners as shown in the diagram below. There will be a 1/4" overlap where the Light Background pieces meet in the middle, this is to compensate for the seam allowance when you are sewing the units together as you create your blocks. Create 12 units measuring 2 1/2" x 10 1/2". Label Sash2

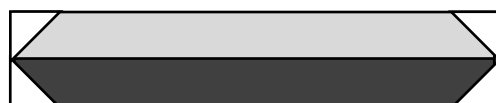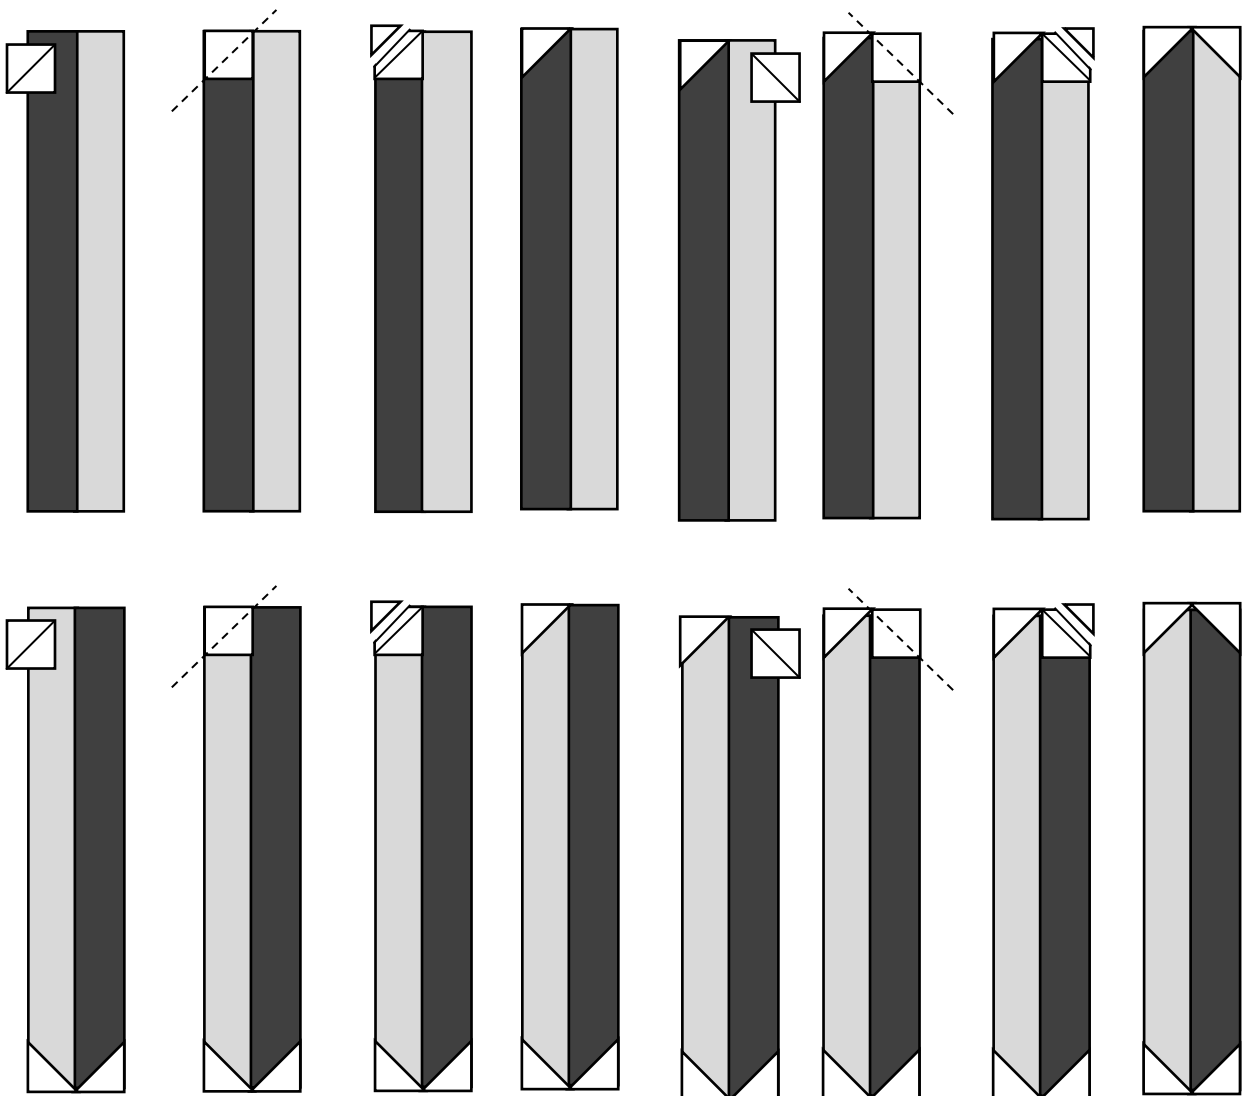

Create 12 units measuring 2 1/2" x 10 1/2". Label Sash2

## Step Fourteen: Sashings 3

**You'll need the following:**



Light:

1 1/2" Squares – 16


2 1/2" Squares - 8




Medium Light:

2 1/2" x 10 1/2" rectangles - 8

Layer a 1 1/2" Light square with the 2 1/2" x 10 1/2" Medium-Light rectangle, right sides together. Sew on the diagonal line. Trim 1/4" from the diagonal line toward the outside corner, as shown. Press the seam allowance toward the outside. Repeat on the other top corner as shown in the diagram below. There will be a 1/4" overlap where the Light Background pieces meet in the middle, this is to compensate for the seam allowance when you are sewing the units together as you create your blocks.

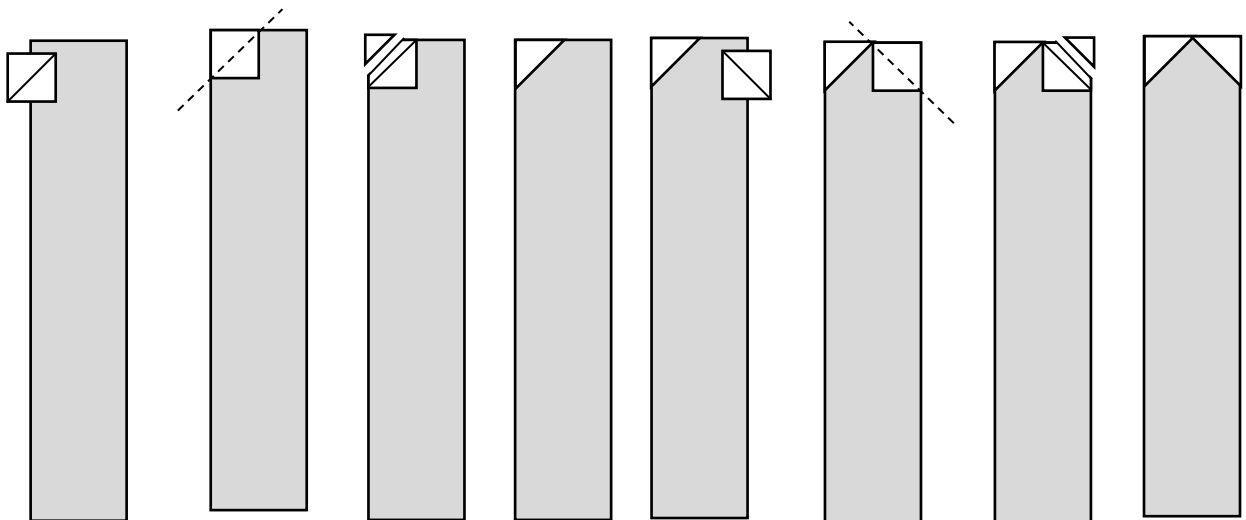

Layer a 2 1/2" Light square with the 2 1/2" x 10 1/2" Medium-Light rectangle, right sides together as shown below. Pay close attention to the orientation of the 2 1/2" square and the direction you are sewing, otherwise you will lose the emerging pattern. Sew on the diagonal line. Trim 1/4" from the diagonal line toward the outside corner, as shown. Press the seam allowance toward the outside.

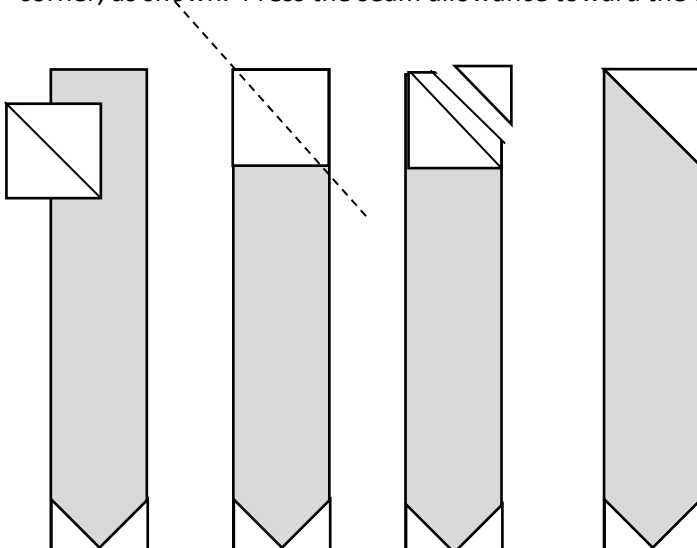

Create 8 units measuring 2 1/2" x 10 1/2".  
Label Sash 3

## Step Fifteen: Sashing 4

You'll need the following:



Light:


2 1/2" Squares - 8




Medium Light:

2 1/2" x 10 1/2" rectangles - 8

Layer a 2 1/2" Light square with the 2 1/2" x 10 1/2" Medium-Light rectangle, right sides together as shown below. Pay close attention to the orientation of the 2 1/2" square and the direction you are sewing, otherwise you will lose the emerging pattern. Sew on the diagonal line. Trim 1/4" from the diagonal line toward the outside corner, as shown. Press the seam allowance toward the outside.

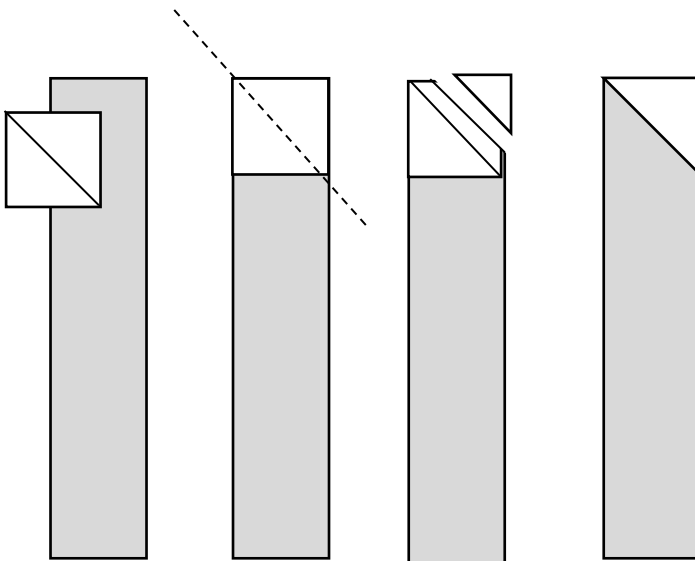

Turn your sashings around as shown below.

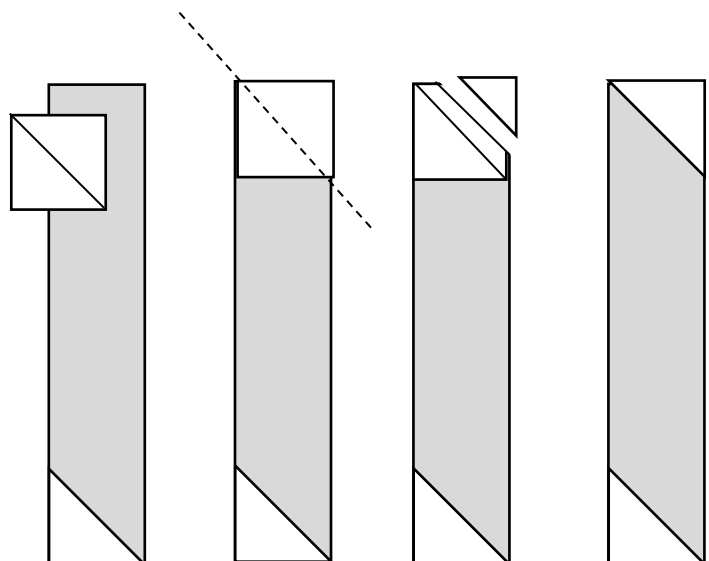

You are going to repeat the process from above. Double check to make sure you have the sashings laying in the correct direction.

Press carefully. Create 8 sashings that measure 2 1/2" x 10 1/2". Label Sash 4.